



PX-0439-NEG

V0


GROVE Wall fixture



Description

Wall light for indoor and outdoor use.

For frontal lighting and downlighting. Structure material: ABS. Structure finish: White, Grey, Black. Diffuser material: Polycarbonate. Diffuser finish: Transparent. Warranty: 5 Years. 11 Product net weight (Kg): 0.3001 Product width or diameter (mm): 120 Product height (mm): 120 Product aperture (mm): 32 1 Class II. IP: IP65. IK: IK10. LED. No. of lampholders or LEDs: 11. LED brand: SUNPU. Driver brand: DRIVER AC. Maximum power of light source: 2.6 W. Colour temperature: Neutral white - 4000K. Colour rendering index: 80. Hours of life: 36.000h L70B30. UGR: 10. Photobiological risk: RG0. % de Flickering: 4.1%. Real flux (lm): 89. Nominal flux (lm): 300. Lm/Real W: 29. Voltage and frequency range: 220-240 VAC. Voltage: 6 V. Intensity: 40 mA. Gear included: Yes, electronic. Total power: 3.1 W. Power factor: 0.43.



Finish

White
Grey
Black
Transparent

Material

ABS
Polycarbonate



TECHNICAL CHARACTERISTICS

Light source

Light source: LED SUNPU
Output (W): 2.6 W
Total power consumption (W): 3.1 W
Color temperature: Neutral white - 4000K
CRI: 80
Real Lumen: 89
Nominal Lumen: 300
Qty Leds: 11
Lm/Real W: 29
Life Time: 36.000h L70B30
Bin / Grup: wg9
UGR: 10
Photobiological risk: RG0

GEAR

Brand: DRIVER AC
Gear included: Yes, electronic
Voltage / Frequency:
100-240V/50-60Hz
Power Factor: 0.43
Flickering: 4.1%





Luminaire

Recessed: No
Uv Protection: NA
Warranty: 5 Years

Logistics

Energy Efficiency: LED A++
EAN Code: 8435381497248
Net Weight (Kg): 0.300
Weight in Kg (packaged): 0.391
Packing: 130 x 100 x 130
Masterbox: 20

The photograph may not match the reference exactly. Please read the product description to identify the finish.

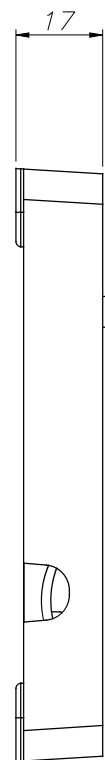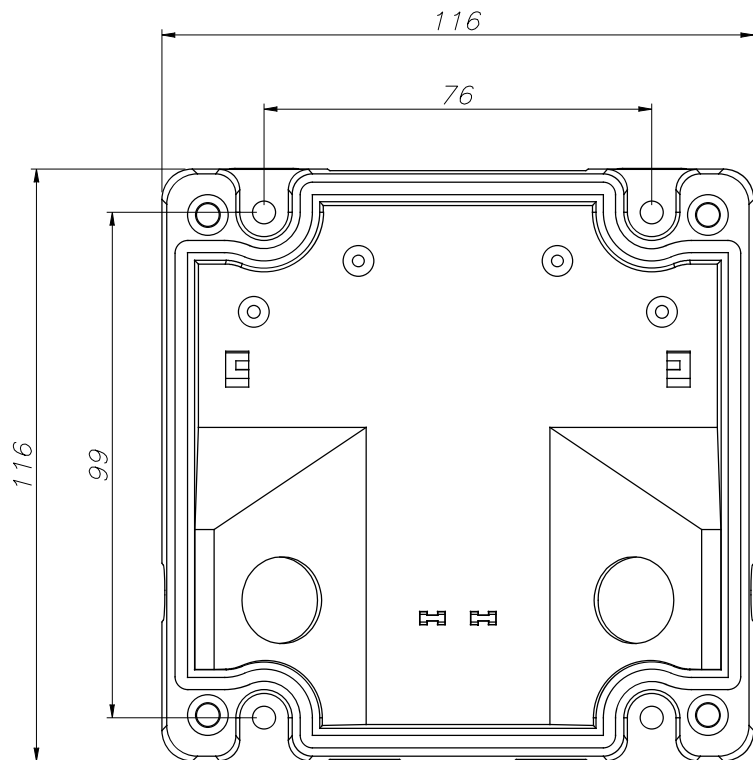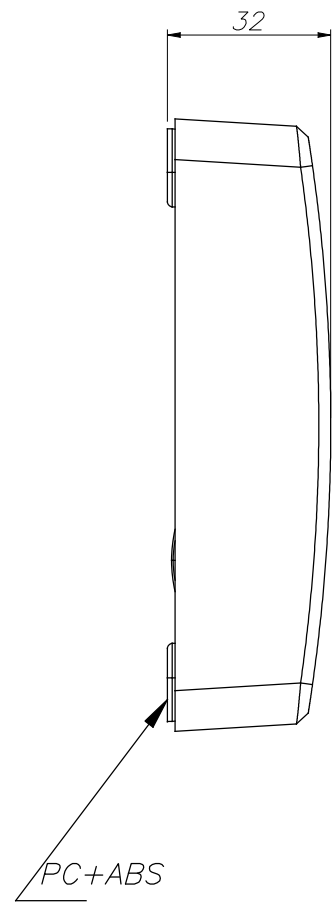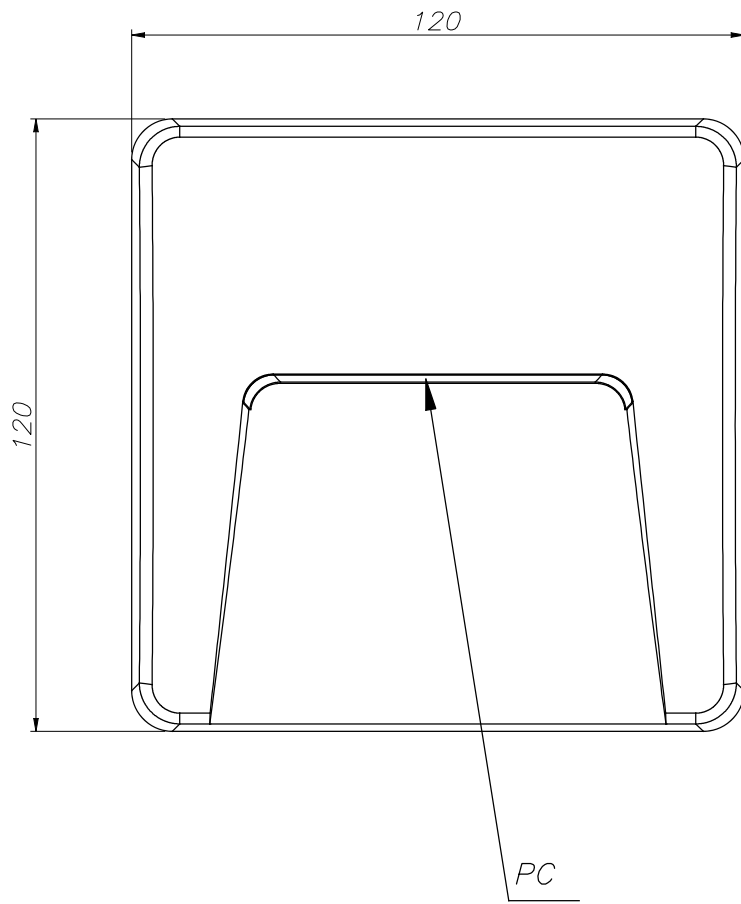

PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE

