

INVISIBLE Beacon



Description

Chillout light for outdoor use.

For downlighting. Suitable for installation in marine environments. The optical module can easily be rotated 360°. Structure material: High purity aluminium, Fiber glass. Structure finish: Black. Diffuser material: Polycarbonate. Diffuser finish: Opal. UV protection. Warranty: 2 Years.11Product net weight (Kg): 0.6351Product width or diameter (mm): 1401Product height (mm): 210011Class II. IP: IP54. IK: IK04. LED. No. of lampholders or LEDs: 104. LED brand: HANGKE. Driver brand: EAGLERISE. Maximum power of light source: 9W. Colour temperature: Warm White - 3000K. Colour rendering index: 80. MacAdam Steps: 3 STEPS. Hours of life: 50.000h L90B10. UGR: 21.4. Photobiological risk: RG0. Real flux (lm): 469. Nominal flux (lm): 864. Lm/Real W: 38. Voltage and frequency range: 100-240 VAC. Gear included: Yes, electronic. Multi-voltage gear included. Total power: 12.3W. Power factor: 0.58.

Finish
Black
Opal

Material
High purity aluminium
Fiber glass
Polycarbonate



TECHNICAL CHARACTERISTICS

Light source

Light source: LED HANGKE
Output (W): 9W
Total power consumption (W): 12.3W
Color temperature: Warm White - 3000K
CRI: 80
Real Lumen: 469
Nominal Lumen: 864
Qty Leds: 104
Lm/Real W: 38
Life Time: 50.000h L90B10
Bin / Grup: 3000K
MacAdam steps: 3 STEPS
UGR: 21.4
Photobiological risk: RG0

GEAR

Brand: EAGLERISE
Gear included: Yes, electronic
Voltage / Frequency:
100-240VAC/50-60Hz
Power Factor: 0.58



Luminaire

Double cable exit: No
Drainage: No
Seaside: Yes
Uv Protection: Yes
Warranty: 2 Years

Logistics

Energy Efficiency: LED A++
EAN Code: 8435381412715
Net Weight (Kg): 0.635
Weight in Kg (packaged): 1.349
Packing: 155 x 110 x 1110
Masterbox: 2

The photograph may not match the reference exactly. Please read the product description to identify the finish.

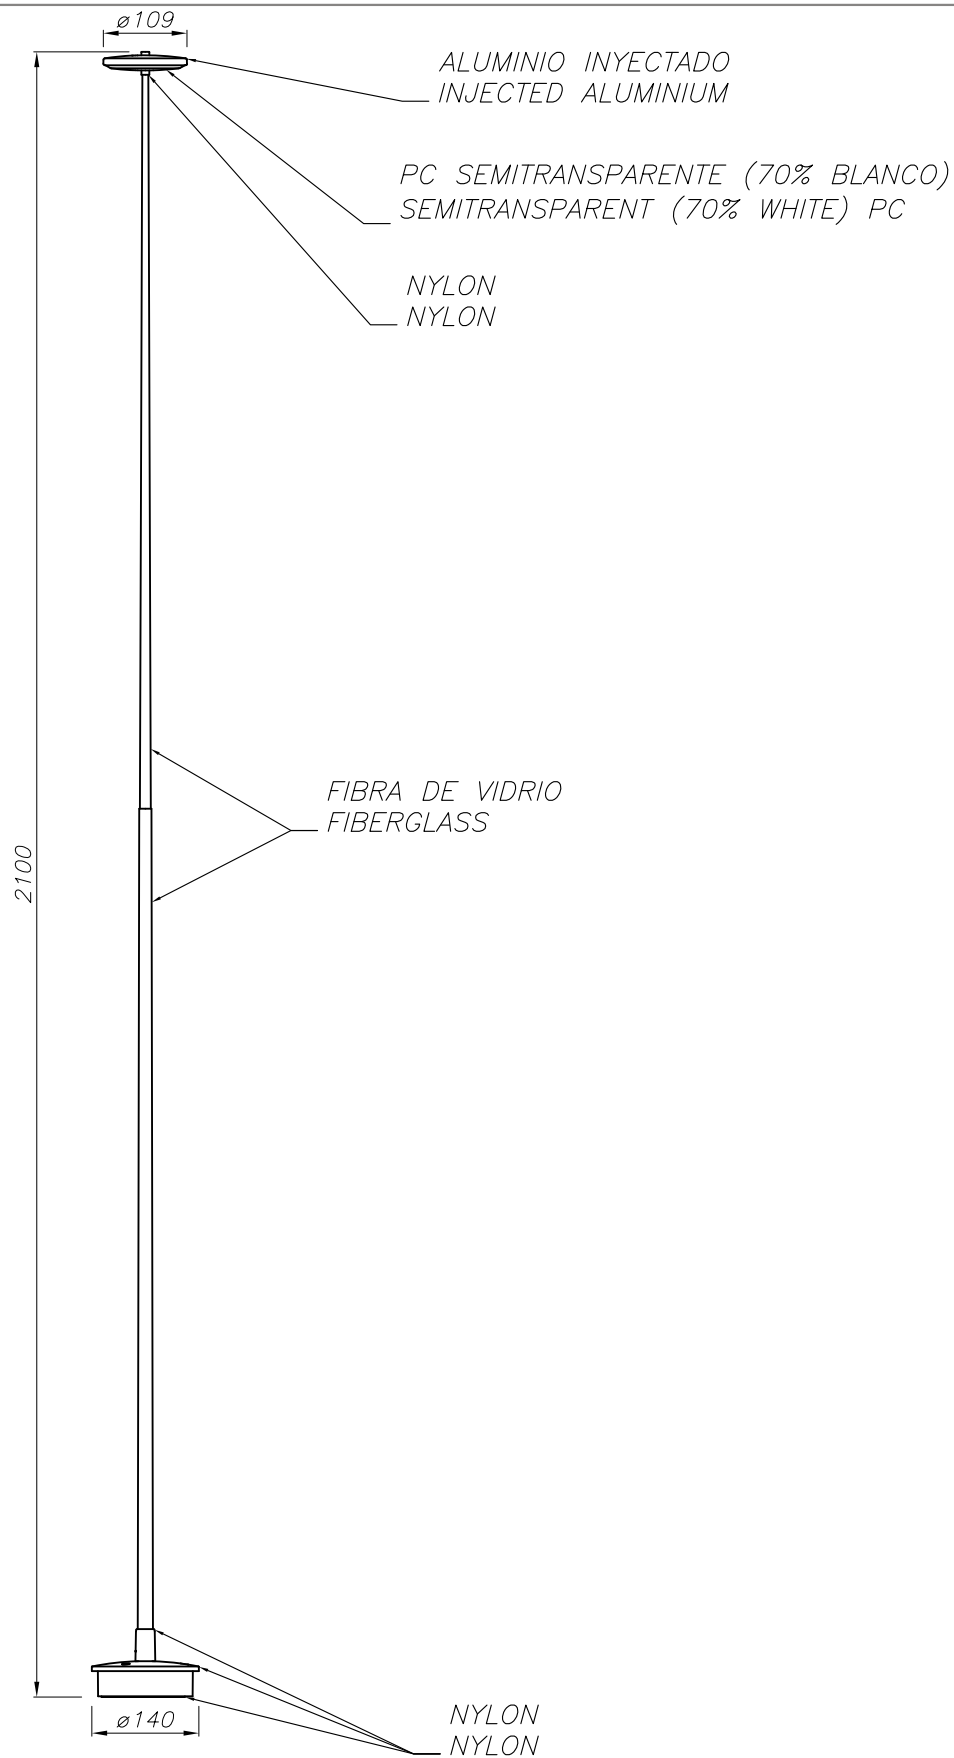

PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE

